


DS-2CE56C2T-IT1/IT3

HD720P Turbo HD EXIR Turret Camera




EXIR

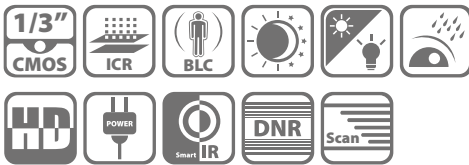

Key features

- HD720P Video Output
- Adopt HDTVl Technology
- True Day/Night, Smart IR
- EXIR technology, 20/40m IR distance
- IP66 weatherproof

Dimensions

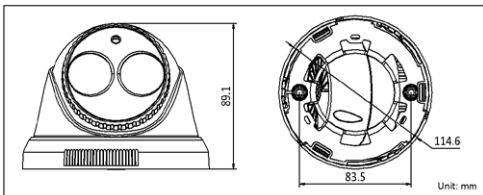

Accessories



Indoor / outdoor wall mount
DS-1272ZJ-110

Indoor wall mount
DS-1258ZJ

Video balun
DS-1H18

Available models

DS-2CE56C2T-IT1
DS-2CE56C2T-IT3

	DS-2CE56C2T-IT1	DS-2CE56C2T-IT3
Camera		
Image Sensor	1 / 3" Progressive Scan CMOS	
Effective Pixels	1280(H)*720(V)	
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR	
Shutter speed	1/25(1/30) s to 1/50,000 s	
Lens	3.6mm (2.8mm, 6mm, 8mm optional)	3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional)
	Angle of View: 71.43°(3.6mm), 92.45°(2.8mm), 46.9°(6mm), 34.5°(8mm)	Angle of View: 76.88°(3.6mm), 99.73°(2.8mm), 50.1°(6mm), 36.8°(8mm), 24.33°(12mm), 18.4°(16mm)
Lens Mount	M12	
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°	
Day & Night	ICR	
Synchronization	Internal synchronization	
Video Frame Rate	25 fps (PAL)/ 30 fps (NTSC)	
HD Video Output	1 Analog HD output	
S / N Ratio	More than 52dB	
General		
Working Temperature / Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)	
Power Supply	12 VDC	
Power Consumption	Max. 3W	Max. 4W
Weather Proof Ratings	IP66	
IR Range	Up to 20m	Up to 40m
Communication	Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron)	
Dimensions	φ114.6 × 89.1mm(φ4.5" × 3.5")	
Weight	300 g (0.66 lb)	